



Kombiplast KP. Gentle compounding and pelletizing of PVC, cable, and shear-sensitive compounds.

»» Quality is our benchmark. This is the only way for you to get exactly what you expect for the processing of PVC, cable, and shear-sensitive compounds: a compounding system that achieves the highest product quality and maximum economic efficiency.

Coperion specializes in the design and implementation of complete plants for the compounding of heat and shear-sensitive plastics – from material handling and feeding, to dryblend production, compounding, and pellet cooling, to storage and filling. Our two-stage Kombiplast KP processing system consisting of a ZSK twin screw extruder and an ES-A single screw

discharge is the heart of these compounding plants. It boasts outstanding mixing behavior, excellent technical flexibility, and good compression and venting capabilities. The Kombiplast KP processes hot and cold dry blend as well as individually fed components. The result are highest product qualities at maximum throughput rates for a very broad range of applications.

AREAS OF APPLICATION FOR THE KOMBIPLAST KP

Plasticized PVC

- › PVC cables: insulation, sheathing, and bedding compounds
- › Material for shoes and shoe soles (also PVC-P with blowing agent)
- › Material for the extrusion of profiles and hoses (also in the medical field)
- › Injection molding compounds
- › Film and sheets for flooring

Rigid PVC

- › Extruded profiles for use indoors and outdoors
- › Injection molding grades for fittings, etc.
- › Blow molding grades for hollow bodies such as bottles, containers, etc.
- › Alloys
- › Films (calender feeding)

Special compounds

- › Halogen-free, self-extinguishing recipes for cables (HFFR)
- › Compounds for elastomer based low, medium, and high tension cable
- › Cross-linkable PE (incorporating peroxide)

› HOSES




› PIPE FITTINGS



› CABLES



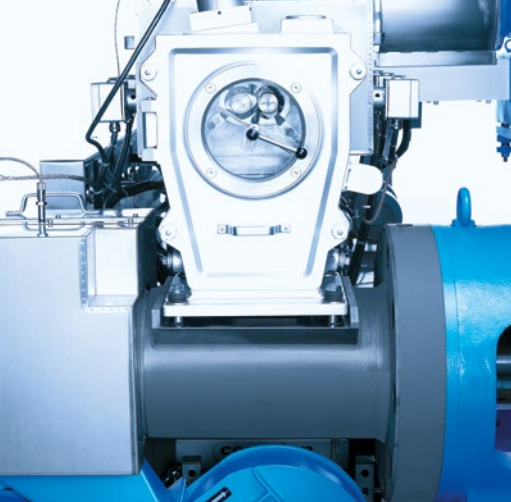

> TRANSITION CHUTE
 > START-UP CHUTE


> ES-A SINGLE SCREW DISCHARGE
 > NEST EGR DIE PLATE

> FULL EGR DIE PLATE
 > TRANSITION CHUTE ZSK/ES-A WITH
 PARTLY REMOVED SCREWS

PROCESS STEPS OF THE KOMBIPLAST PLANTS IN DETAIL


- > Feeding of the raw material (dry blend or single components) through a ZS-B twin screw side feeder equipped with cooled barrel and stirred hopper. ZS-B can be used as volumetric feeder by variable drive.
- > Compression, mixing, and gelling of the premix in the ZSK twin screw extruder with the option of adding pigments (solid or liquid) directly to the process section.
- > Start-up diverter to discharge start-up and shut-down product.
- > Venting of the compounded mass by atmospheric pressure or vacuum.
- > Compression and gentle pressure build-up for pelletizing using the ES-A single screw discharge. The screw is temper capable; its housing is heated electrically and cooled with water.
- > Discharge of the product by the electrically heated die plate. The die plate is attached to the flange of the ES-A cylinder and can be removed quickly and easily for cleaning. The distance between the ES-A screw and the die plate can be adjusted.
- > Dry blend pelletizing by EGR eccentric pelletizer. The ergonomically designed knife blade has infinitely variable speed control. The knives on the two- or multiple-arm knife blade are easily adjusted. The pelletizer hood is made of quiet cast aluminum and can be equipped with a water spraying unit on request.
- > The hot pellets are conveyed from the pelletizer to the cooling unit in air. In special cases, conveyance can be achieved by water/air or water.
- > The pellets are cooled in a fluidized bed. The volume and distribution of the air are adjustable. Inspection windows and doors allow good control as well as easy and fast cleaning of the cooling chamber in the case of product changes. The fluidized bed can be equipped with an air heater to dry the surface of the pellets.

HORIZONTAL SECTION OF THE TWO-STAGE KOMBIPLAST KP

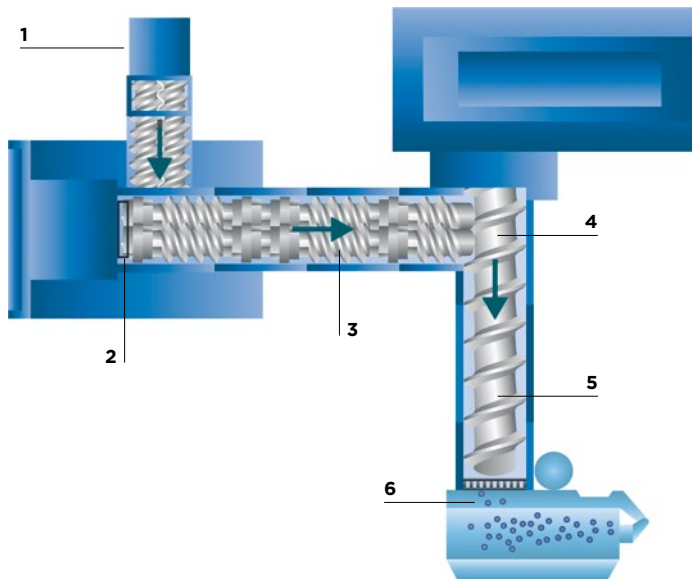

- 1 ZS-B twin screw side feeder
- 2 Venting
- 3 ZSK twin screw extruder
- 4 Vacuum venting
- 5 ES-A single screw discharge
- 6 EGR eccentric pelletizer


SCHEMATIC DESIGN OF A KOMBIPLAST KP PLANT

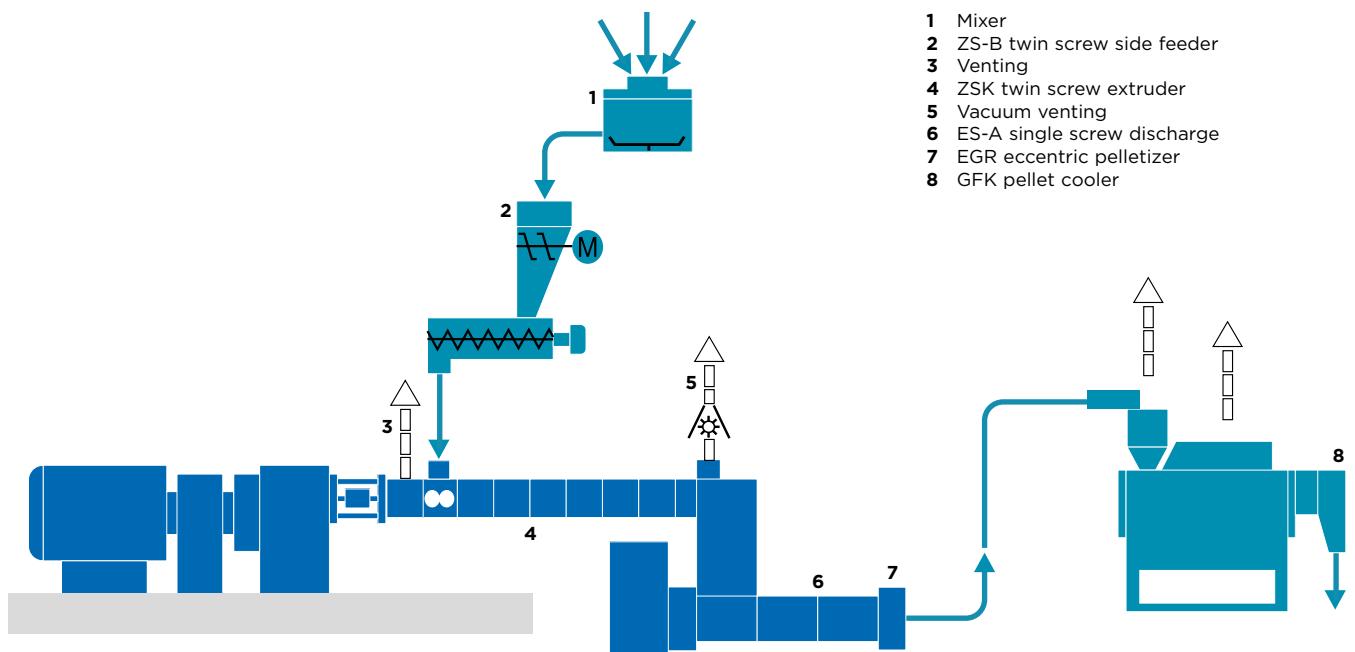

- 1 Mixer
- 2 ZS-B twin screw side feeder
- 3 Venting
- 4 ZSK twin screw extruder
- 5 Vacuum venting
- 6 ES-A single screw discharge
- 7 EGR eccentric pelletizer
- 8 GFK pellet cooler

ADVANTAGES OF THE KOMBIPLAST KP AT A GLANCE

Good infeed behavior even with poorly flowing powders and hot pre-mix from fast mixers	Very uniform shearing, homogenization, and pelletizing of the product recipes
Very gentle operation and short residence time for maximum product quality	Highest flexibility for product changes and machine modifications, resulting in a wide range of applications
Exact temperature control	Effective devolatilization of volatile components
Low specific energy requirement	Very wide range of material solutions
High economic efficiency of the processing plant	Intensive process support
Flexible control solutions	High reliability and proven machine technology
Easy cleaning for fast product change in the case of different batch sizes	Comprehensive after-sales service by worldwide Coperion service network

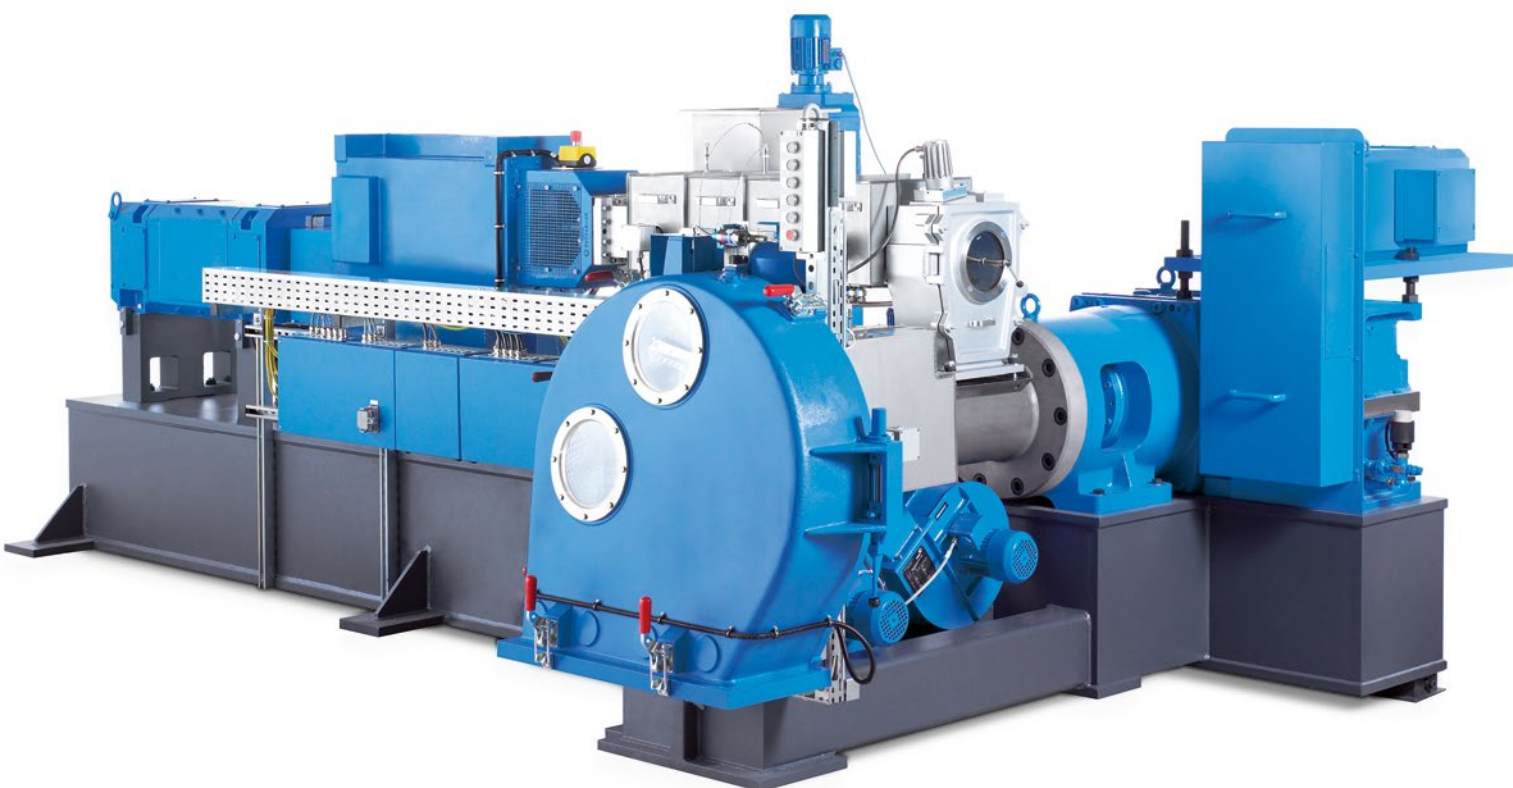

»» Processing of cable compounds. In the production of cable compounds, quality is the real deciding factor.

Because of its good mixing properties, the reproducibility of the process, product purity, and the great flexibility of the recipes, many producers in the cable industry rely on the continuous processing of the Kombiplast KP. For high accuracy feeding of all ingredients feeders of Coperion K-Tron are used. The special Kombiplast hybrid version can process either PVC


or halogenfree flame-retardant compounds (HFFR) economically. The Kombiplast hybrid differs from a pure PVC plant in particular by an extended process section of the ZSK Mv PLUS twin screw extruder and by the use of a second ZS-B twin screw side feeder.

AREAS OF APPLICATION


- › Temperature and shear-sensitive products like cable insulations and sheaths
- › XLPE by silane crosslinking such as Sioplas
- › Reactive compounding, highly filled, flame-retardant compounds, semiconductor compounds, and special products that contain alloys and blends



TYPICAL SET-UP FOR THE COMPOUNDING OF PVC

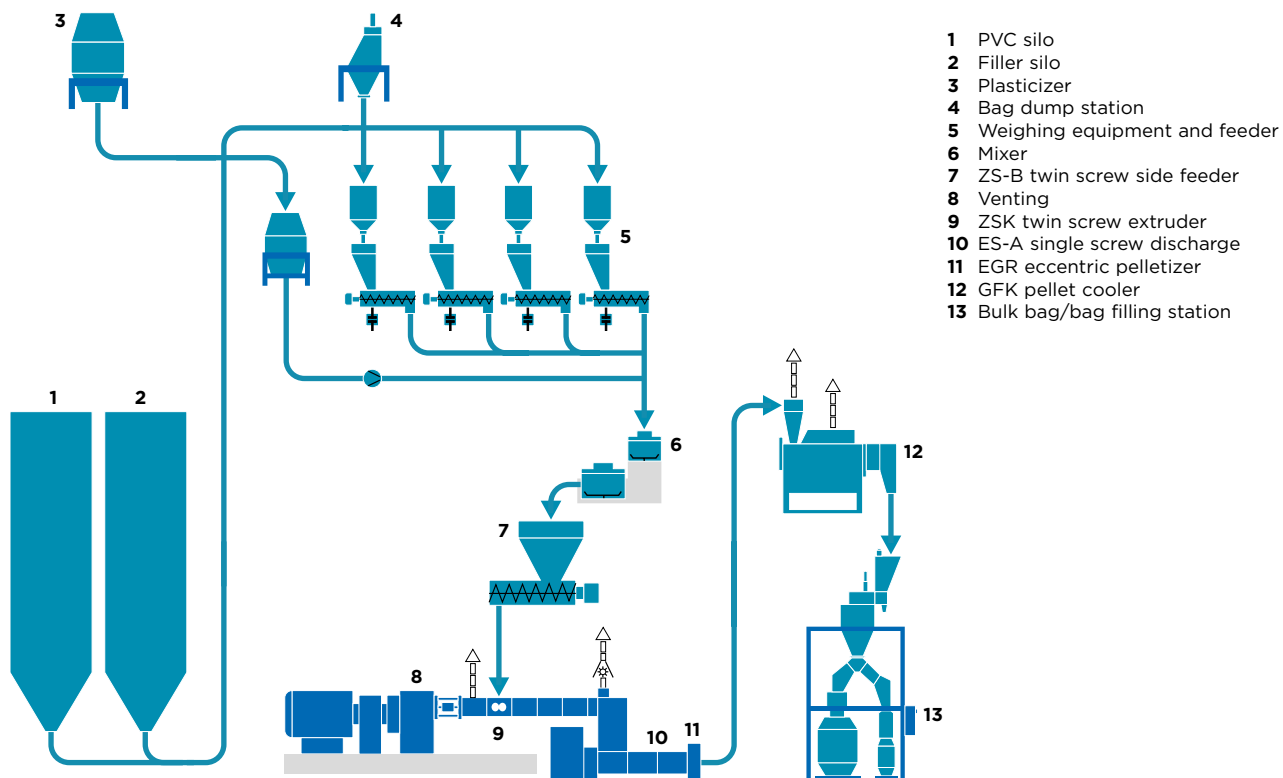

TYPICAL SET-UP FOR THE COMPOUNDING OF HIGHLY FILLED, FLAME-RETARDANT CABLE MATERIALS (HFFR)

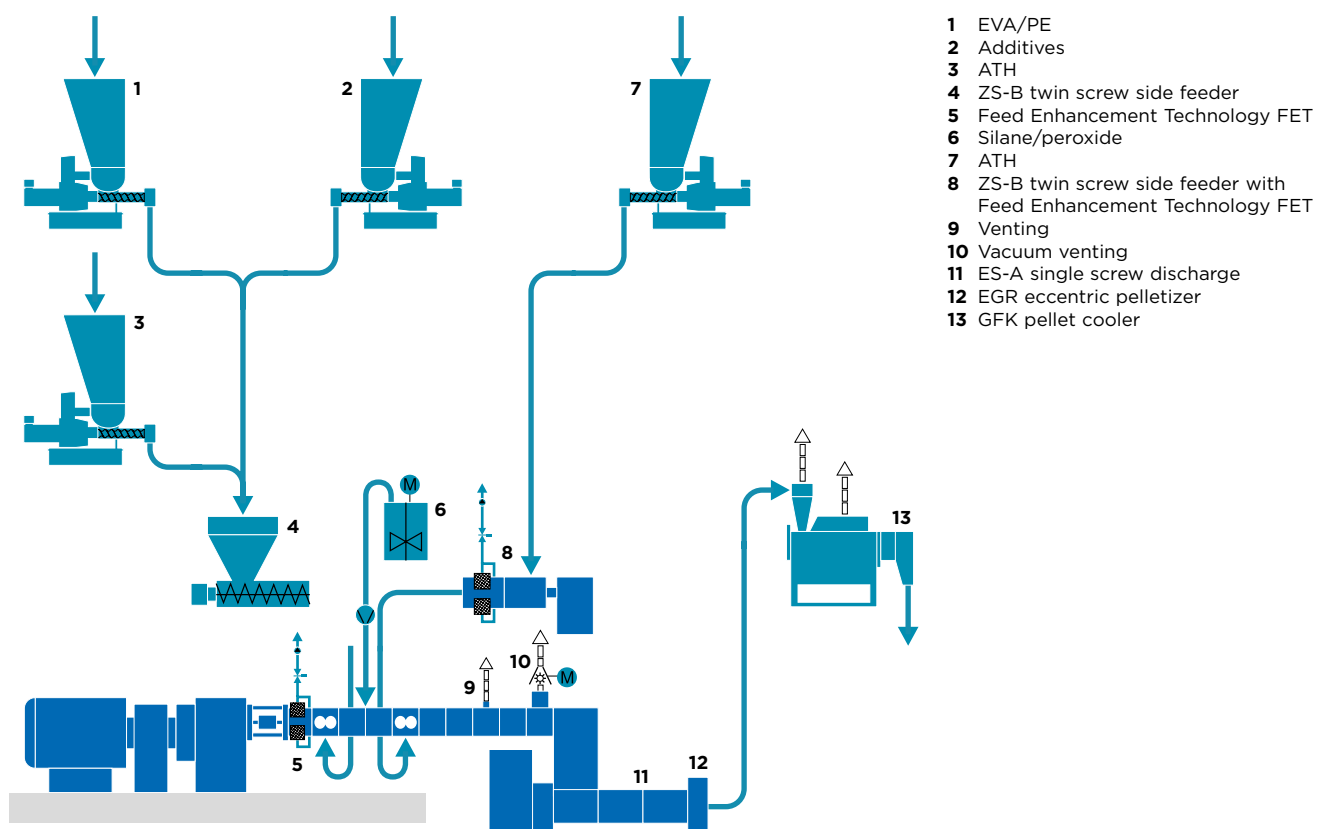

»» Processing of PVC for calender feeding. Outstanding mixing, gelling, and venting properties make the Kombiplast KP the ideal processing plant for films.

The Kombiplast KP is optimally suited for compounding PVC for films of the widest range of widths and thicknesses. It provides economic, flexible, and reliable feeding of calenders. By using high accuracy feeders of Coperion K-Tron the through-


put rates of the Kombiplast KP can be varied easily as required by the process. The plant also features very good mixing, gelling, and venting properties that ensure a very homogeneous, blister-free product quality.

ADVANTAGES OF THE KOMBIPLAST KP FOR THE PRODUCTION OF FILMS


- › Moderate shearing rates without peaks
- › Ideal for heat and shear-sensitive products
- › Fast reaction times due to predominantly mechanical energy consumption, tempering mainly for surface conditioning
- › Short residence time for uniformly low thermal load
- › Optimal venting due to frequent surface renewal
- › Outstanding distributive and dispersive mixing due to the high number of shearing cycles
- › Temperature measurement and injection of liquids directly into the melt possible at any point



TYPICAL SET-UP FOR CALENDER FEEDING WITH PVC

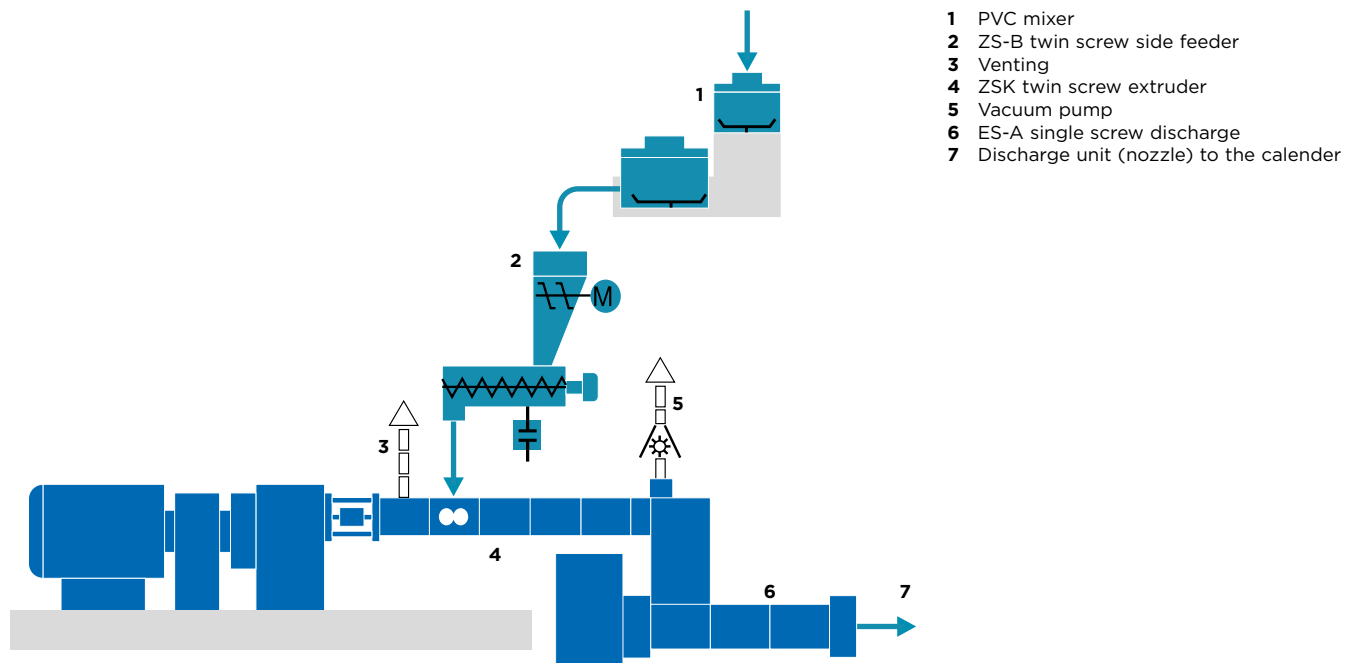

TYPICAL SET-UP FOR CALENDER FEEDING WITH PVC AND POLYOLEFIN

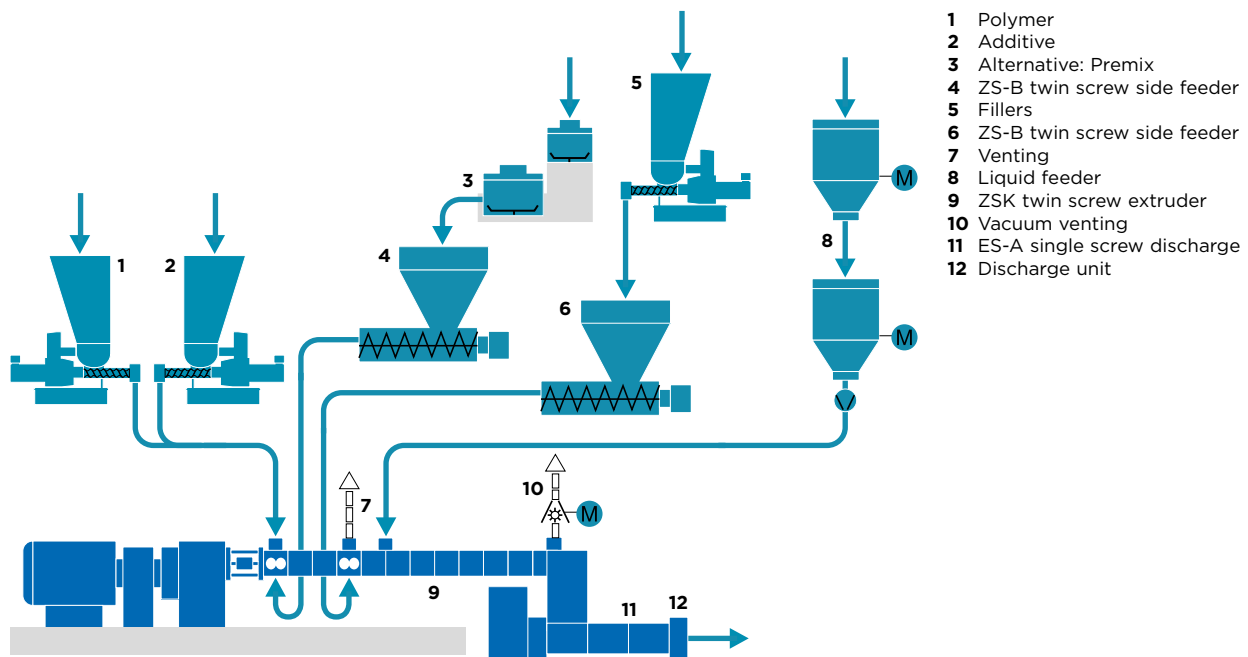

»» Processing of PVC for flooring. Whether multi-layer or monolayer design – Kombiplast KP ensures first-class product quality for floor coverings.

Thanks to the excellent product quality that it delivers, the Kombiplast KP is ideally suited for the compounding of PVC for flooring. The system structure differs depending on whether


the flooring is composed of multiple layers (base layer, decorative layer, top layer, e.g. luxury vinyl tiles) or a single layer (forms its own pattern).

FLOORING COMPOSED OF MULTIPLE LAYERS


The individual layers are compounded separately, calendered, and then bonded with an intermediate layer containing glass fibers. Next, the flooring surface is pressed. The typical system set-up is the one for calender feeding with PVC (see page 9).

MONOLAYER FLOORING


Several – usually three – ZSK twin screw extruders are used to compound strands of different colors. The ZSKs consist of nine housings each into which the dry blend and dye are fed gravimetrically by feeders of Coperion K-Tron. The colored strands of the ES-A single screw discharge are fed by conveyor belts. The strands only mix together slightly in the ES-A and produce pellets that form their own pattern from the basic colors and shades. Color accents can be provided by adding decorative pellets to the feed hopper of the ES-A. Then a belt press is used to work the pellets into a continuous floor covering and press its surface.

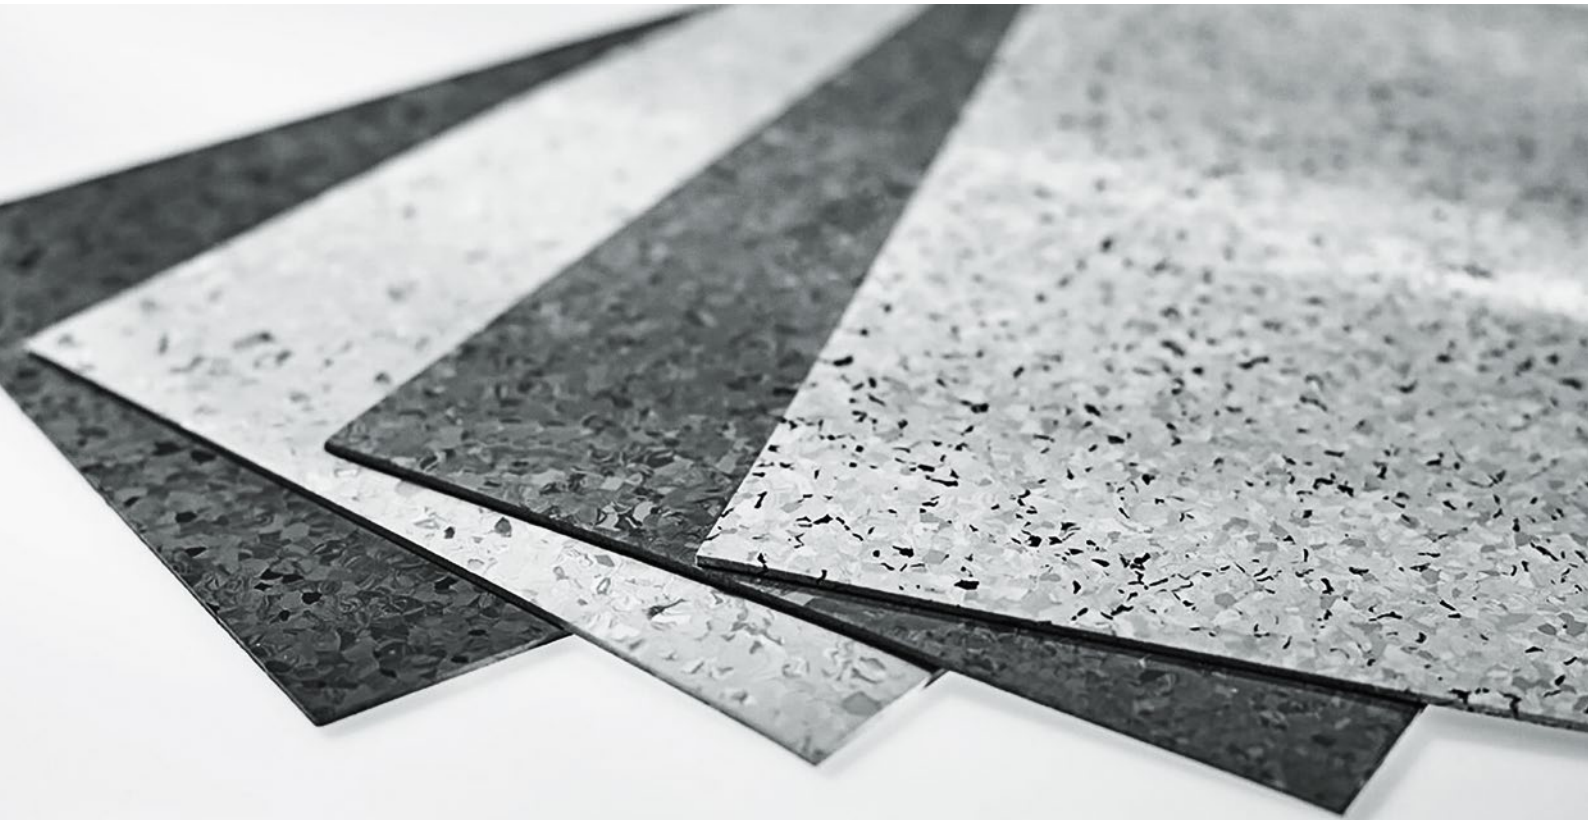

TYPICAL SET-UP FOR THE PRODUCTION OF MONOLAYER FLOORING

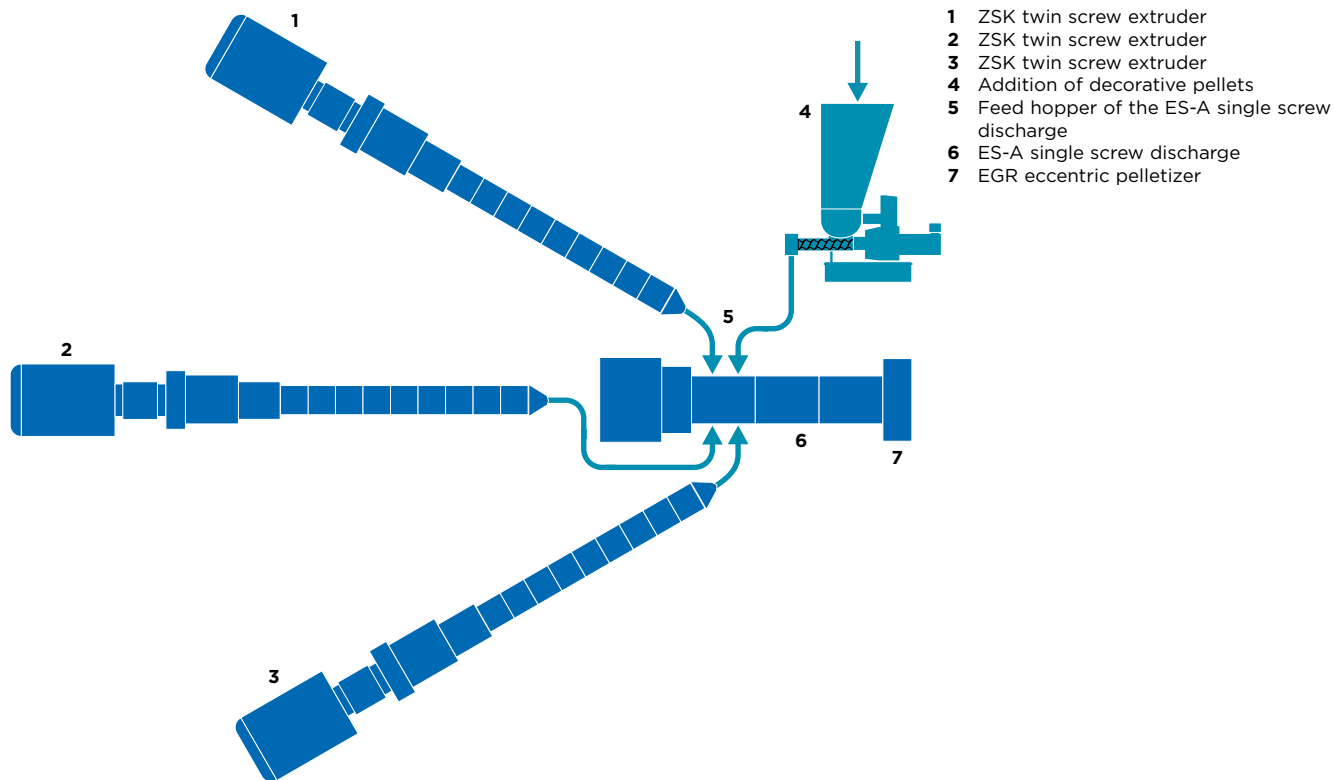

TYPICAL SET-UP OF THE ZSK TWIN SCREW EXTRUDERS

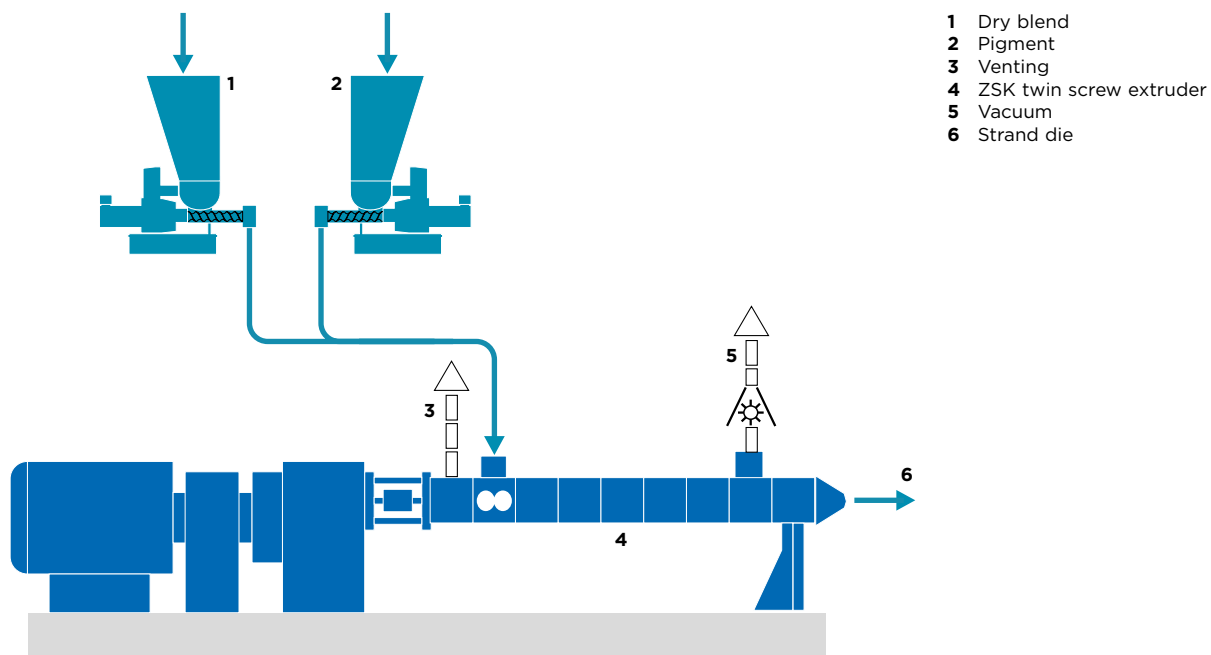

TECHNICAL DATA

Kombiplast with ZSK Mv PLUS

Kombiplast ZSK/ES-A	Max. torque per shaft [Nm]	Max. specific torque Md/a^3 [Nm/cm ³]	Screw speed [min ⁻¹]	Max. motor power N [kW]	Screw diameter [mm]
27 Mv PLUS/60	100/400	10.6	600/115	13/4	27/60
34 Mv PLUS/100	205/1,200	11.3	600/100	27/15	34/100
43 Mv PLUS/150	420/4,050	11.3	600/75	55/45	43/150
54 Mv PLUS/150	815/4,050	11.3	600/75	108/45	54/150
62 Mv PLUS/200	1,250/9,600	11.3	600/75	165/80	62/200
76 Mv PLUS/250	2,275/18,750	11.3	600/50	300/125	76/250
98 Mv PLUS/300	5,000/32,400	11.3	400/50	440/180	98/300
125 Mv PLUS/350	10,300/51,450	11.3	400/50	906/285	125/350

Throughput rates for Kombiplast with ZSK Mv PLUS


Kombiplast ZSK/ES-A	PVC-P [kg/h]	PVC-U [kg/h]	HFFR [kg/h]
27 Mv PLUS/60	150	100	80
34 Mv PLUS/100	600	250	125
43 Mv PLUS/150	900	500	250
54 Mv PLUS/150	1,500	900	500
62 Mv PLUS/200	2,700	1,400	750
76 Mv PLUS/250	4,400	2,300	1,200
98 Mv PLUS/300	6,600	3,600	2,800
125 Mv PLUS/350	13,500	7,000	5,800

Kombiplast with ZSK Mc¹⁸

Kombiplast ZSK/ES-A	Max. torque per shaft [Nm]	Max. specific torque Md/a^3 [Nm/cm ³]	Screw speed [min ⁻¹]	Max. motor power N [kW]	Screw diameter [mm]
26 Mc ¹⁸ /60	140/400	15	600/115	18/4	25/60
32 Mc ¹⁸ /100	315/1,300	18	600/100	42/15	32/100
45 Mc ¹⁸ /100	930/1,300	18	600/100	123/15	45/100
58 Mc ¹⁸ /150	2,000/8,000	18	600/75	264/45	58/150
70 Mc ¹⁸ /200	3,500/15,000	18	600/75	462/66	70/200
92 Mc ¹⁸ /250	7,500/30,000	17	600/50	990/100	92/250
92 Mc ¹⁸ /300	7,500/55,000	17	600/50	990/150	92/300
119 Mc ¹⁸ /300	15,300/55,000	17	400/50	1,346/150	118/300
133 Mc PLUS/350	20,000/80,000	15	400/50	1,759/170	133/350

Throughput rates for Kombiplast with ZSK Mc¹⁸

Kombiplast ZSK/ES-A	PVC-P [kg/h]	PVC-U [kg/h]	HFFR [kg/h]
26 Mc ¹⁸ /60	150	100	60
32 Mc ¹⁸ /100	500	250	200
45 Mc ¹⁸ /100	900	500	400
58 Mc ¹⁸ /150	1,500	900	600
70 Mc ¹⁸ /200	2,700	1,400	1,000
92 Mc ¹⁸ /250	5,500	3,000	2,500
92 Mc ¹⁸ /300	6,800	3,500	2,500
119 Mc ¹⁸ /300	8,300	4,000	5,000
133 Mc PLUS/350	13,500	7,000	5,500

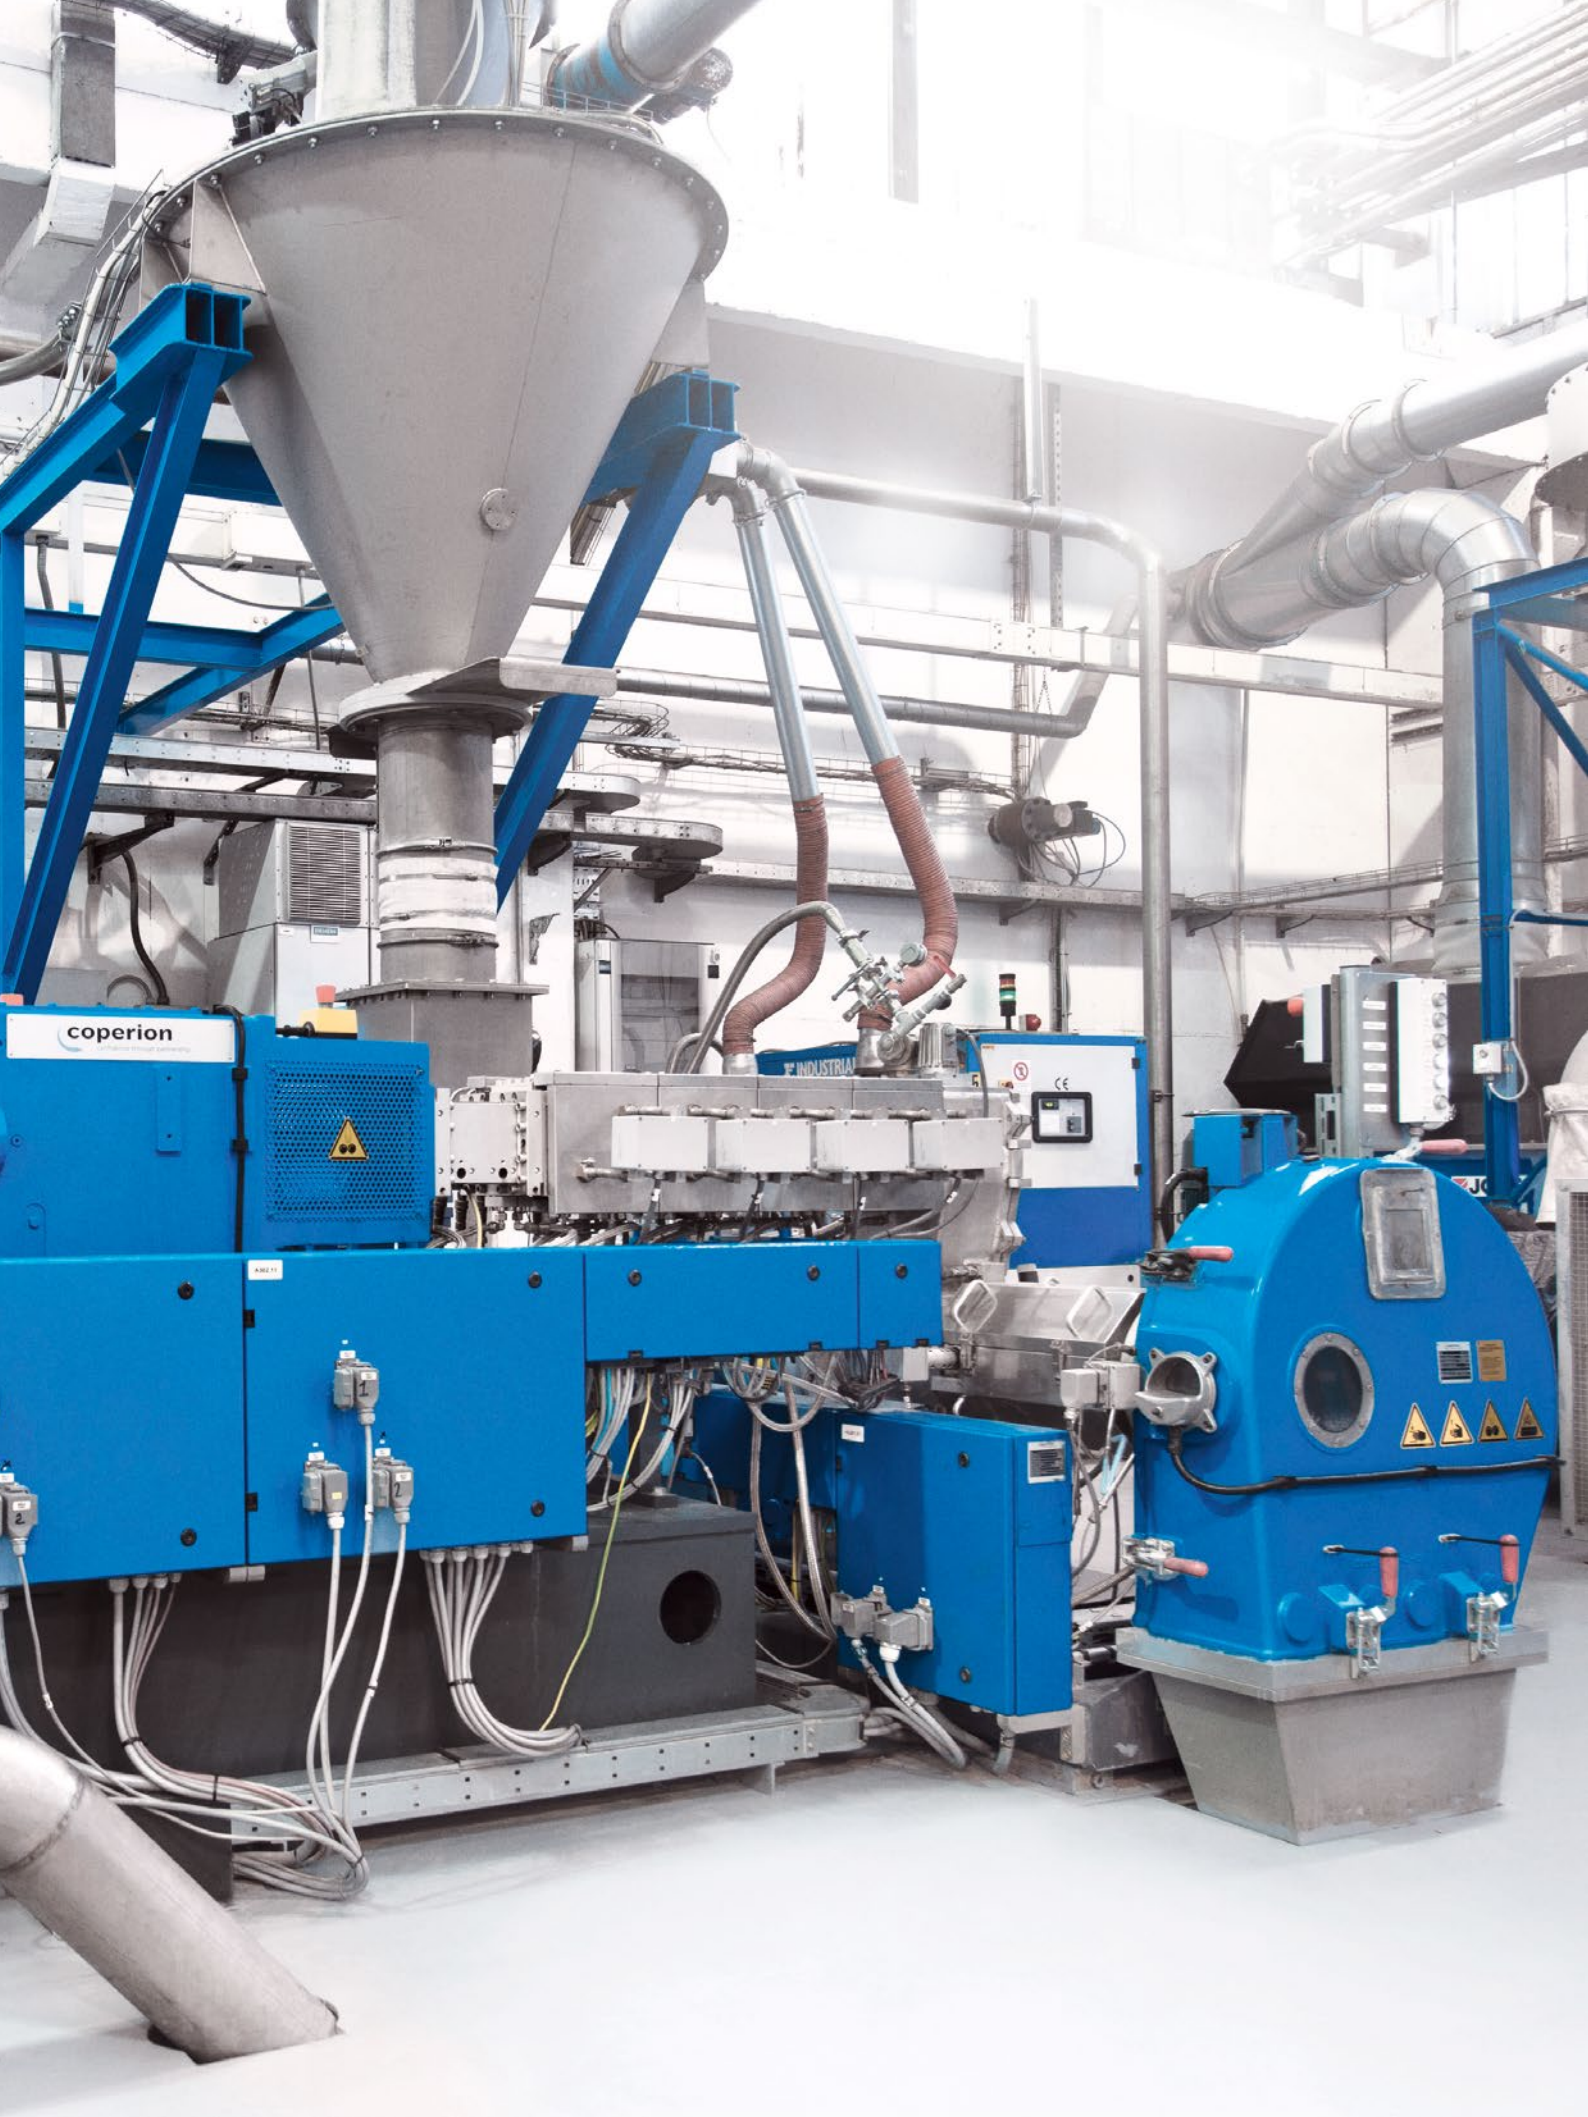

Coperion GmbH

Compounding & Extrusion
Theodorstrasse 10
70469 Stuttgart, Germany
Tel.: +49 711 897-0
Fax: +49 711 897-3999
info.cc-ce@coperion.com

Coperion GmbH

Materials Handling
Niederbieger Strasse 9
88250 Weingarten, Germany
Tel.: +49 751 408-0
Fax: +49 751 408-200
info.cc-mh@coperion.com

Coperion GmbH

Service
Theodorstrasse 10
70469 Stuttgart, Germany
Tel.: +49 711 897-0
Fax: +49 711 897-3999
info.cc-se@coperion.com

info@coperion.com
www.coperion.com

> Europe

Belgium, Luxembourg, Netherlands
Coperion N.V.
Industrieweg 2, 2845 Niel, Belgium
Tel.: +32 3 870-5100
Fax: +32 3 877-0710

France

Coperion S.a.r.l.
20 chemin Louis Chirpaz
Bâtiment C
69130 Ecully, France
Tel.: +33 469 848 190
Fax: +33 469 848 199

Coperion K-Tron France S.a.r.l.

56 boulevard de Courcerin
77183 Croissy-Beaubourg, France
Tel.: +33 64 801 600
Fax: +33 64 801 599

Germany

Coperion GmbH
Germany West Office
Industriestrasse 71a
50389 Wesseling, Germany
Tel.: +49 2232 20700-10
Fax: +49 2232 20700-11

Coperion Pelletizing Technology GmbH

Heinrich-Krumm-Strasse 6
63073 Offenbach, Germany
Tel.: +49 69 989 5238-0
Fax: +49 69 989 5238-25

Coperion K-Tron Deutschland GmbH

Im Steinigen Graben 10
63571 Gelnhausen, Germany
Tel.: +49 6051 9626-0
Fax: +49 6051 9626-44

Italy

Coperion S.r.l.
Via E. da Rotterdam, 25
44122 Ferrara, Italy
Tel.: +39 0532 7799-11
Fax: +39 0532 7799-80

Coperion S.r.l.

Milan Office
Via XXV Aprile, 49
20091 Bresso (MI), Italy
Tel.: +39 02 241 049-01
Fax: +39 02 241 049-22

Russian Federation, CIS

OOO Coperion
Proezd Serebryakova 14,
Bld. 15, Office 219
129343 Moscow, Russian Federation
Tel.: +7 499 258 4206
Fax: +7 499 258 4206

Spain, Portugal

Coperion, S.L.
Balmes, 73, pral.
08007 Barcelona, Spain
Tel.: +34 93 45173-37
Fax: +34 93 45175-32

Sweden, Denmark, Finland, Norway

Coperion AB
Linnégatan 81
SE-114 60 Stockholm, Sweden
Tel.: +46 8 608-1818

Switzerland

Coperion K-Tron (Schweiz) GmbH
Lenzhardweg 43/45
5702 Niederlenz, Switzerland
Tel.: +41 62 8857-171
Fax: +41 62 8857-180

United Kingdom

Coperion Ltd.
Coperion K-Tron Great Britain Ltd.
Unit 4, Acorn Business Park
Heaton Lane
Stockport, SK4 1AS, United Kingdom
Tel.: +44 161 209 4810
Fax: +44 161 474 0292

> Asia

China

Coperion (Nanjing) Machinery Co. Ltd.
No. 1296 Jiyin Avenue
Jiangning District
Nanjing 211106, PR China
Tel.: +86 25 5278 6288
Fax: +86 25 5261 1188

Coperion International Trading (Shanghai) Co. Ltd.

Coperion Machinery & Systems (Shanghai) Co. Ltd.
Bldg. A2, 6000 Shenzhuan Road
Dongjing Town, Songjiang District
Shanghai 201619, PR China
Tel.: +86 21 6767 9505
Fax: +86 21 6767 9108

Coperion K-Tron (Shanghai) Co. Ltd.

Building A2-A3
No. 6000 Shen Zhuan Gong Road
Songjiang District
201619 Shanghai, PR China
Tel.: +86 21 6375 7925
Fax: +86 21 6375 7930

India

Coperion Ideal Pvt. Ltd.
Ideal House, A-35, Sector 64
201307 Noida (U.P.), India
Tel.: +91 120 4299 333
Fax: +91 120 4308 583

Japan

Coperion K.K.
4F, Leaf Square Shin-Yokohama Bldg.
3-7-3, Shin-Yokohama,
Kohoku-ku Yokohama,
Kanagawa 222-0033, Japan
Tel.: +81 45 595 9801
Fax: +81 45 595 9802

Saudi Arabia

Coperion Middle East Co. Ltd.
P. O. Box 821
Jubail - 31951, Saudi Arabia
Tel.: +966 3 341 1368
Fax: +966 3 341 1052

Singapore

Coperion Pte. Ltd.
Coperion K-Tron Asia Pte. Ltd.
8 Jurong Town Hall Road
#28-01/02/03 The JTC Summit
Singapore 609434
Tel.: +65 641 88-200
Fax: +65 641 88-203

Taiwan

Coperion (Nanjing) Machinery Co. Ltd.
Taiwan Branch Office
5F, No. 43, Alley 115
Chung San North Road Sec. 2
Taipei, Taiwan
Tel.: +886 2 2521 3580
Fax: +886 2 2521 1604

> America

South America

Coperion Ltda.
R. Arinos, 1000
RBCA - Royal Business Center
Anhanguera, Módulo 4
Parque Industrial Anhanguera
06276-032 Osasco - SP, Brazil
Tel.: +55 11 3874-2740
Fax: +55 11 3874-2757

USA, Canada, Mexico, NAFTA
Coperion Corporation
590 Woodbury Glassboro Road
Sewell, NJ 08080, USA
Tel.: +1 201 327-6300
Fax: +1 201 825-6494

Coperion Corporation Wytheville Office

285 Stafford Umberger Drive
P.O. Drawer 775
Wytheville, VA 24382, USA
Tel.: +1 276 228-7717
Fax: +1 276 228-7682

Coperion Corporation Houston Office

7900 North Sam Houston Pkwy, West
Suite 202
Houston, TX 77064, USA
Tel.: +1 281 449-9944
Fax: +1 281 449-4599

Coperion K-Tron Pitman, Inc.

590 Woodbury Glassboro Road
Sewell, NJ 08080, USA
Tel.: +1 856 589-0500
Fax: +1 856 589-8113

Coperion K-Tron Salina, Inc.

606 North Front Street
Salina, KS 67401, USA
Tel.: +1 785 825-1611
Fax: +1 785 825-8759

For more information about
the worldwide Coperion network,
visit www.coperion.com