


Two-Way-Diverter Valve WGV




SINGLE CHANNEL DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS


- _ Symmetrical design
- _ For distribution in gravity pipes at up to 1 barg system pressure

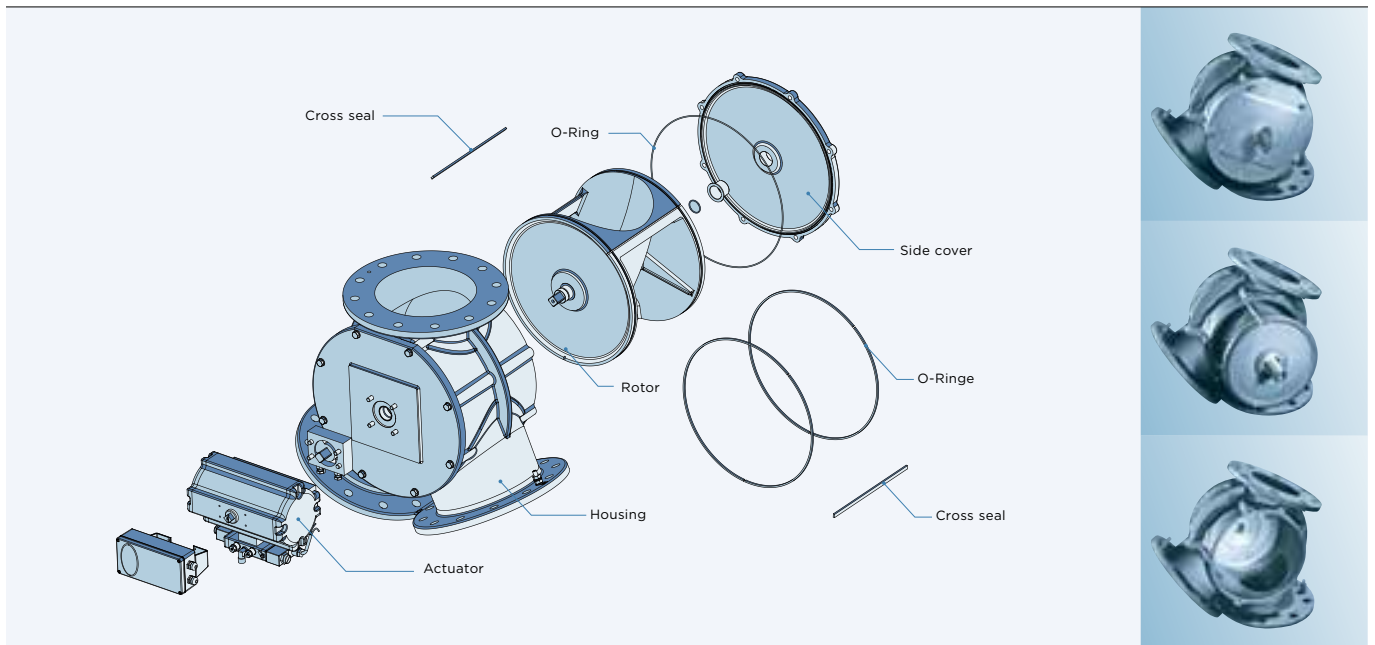


Flow capacity without counter current

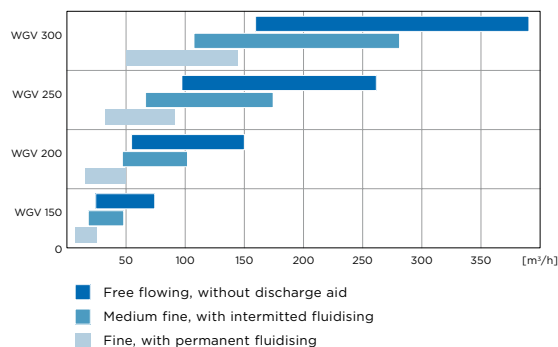

Diverted left

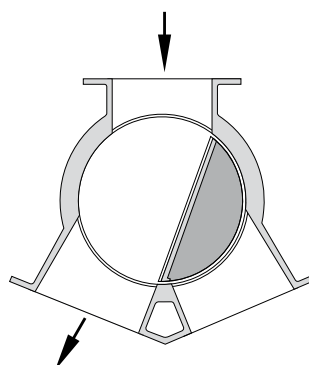


Diverted right

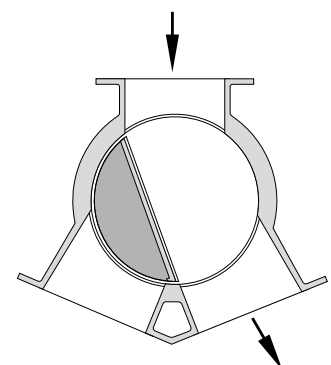

DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS | WGV

PRESSURE RANGE	1 barg (15 psi) system pressure
OPERATION TEMPERATURE	-20°C up to 100°C
APPLICATION	Suitable for fluid group 2 according PED (fluid group 1 on demand)
SEAL CONFIGURATION	Cross seals on rotor between the outlets
MATERIAL OF CONSTRUCTION	Cast aluminium

OPTIONS AND ACCESSORIES
_ Applicable in Ex-Zones with additional accessories
_ Hard coated
_ Quick cleaning design

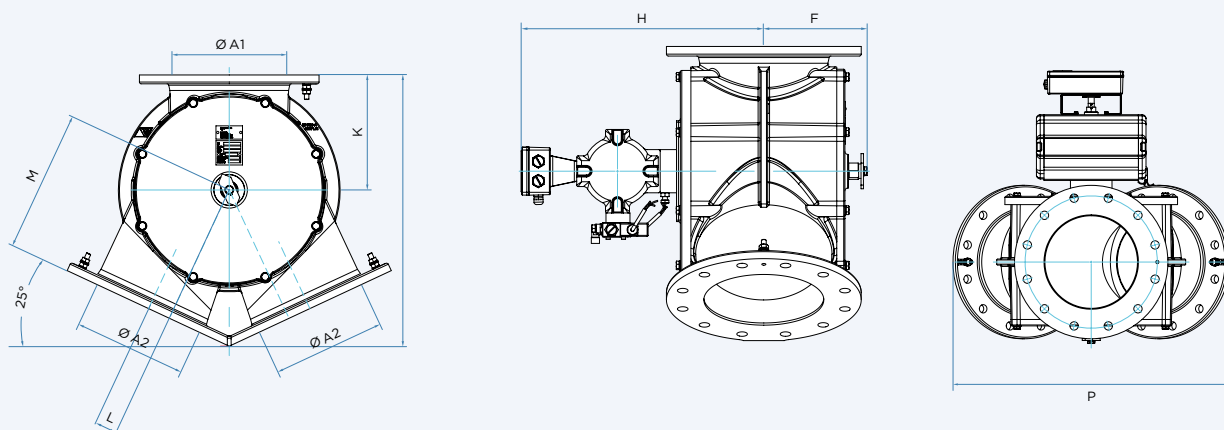

	Inlet*/Outlet*				Other dimensions							Weight appr. kg
	A1/A2 (DIN)	A1/A2 (ANSI)	Ø A1	Ø A2	F	H	K	L	M	P	R	
WGV 150	ND 150	6"	150	150	155	372	185	52	200	522	405	45
WGV 200	ND 200	8"	200	200	180	415	220	52	260	622	506	64
WGV 250	ND 250	10"	250	250	210	506	260	52	320	733	613	94
WGV 300	ND 300	12"	315	300	238	529	335	65	400	890	772	142

Dimensions in mm

* Drilled according to DIN PN 10 or ANSI 150 lbs