


## Two-Way-Diverter Valve WHK




### COMPACT SINGLE CHANNEL DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS


- \_ With sealed rotor and 45° outlet
- \_ For space-saving installation in conveying lines or in gravity pipes at up to 3 barg

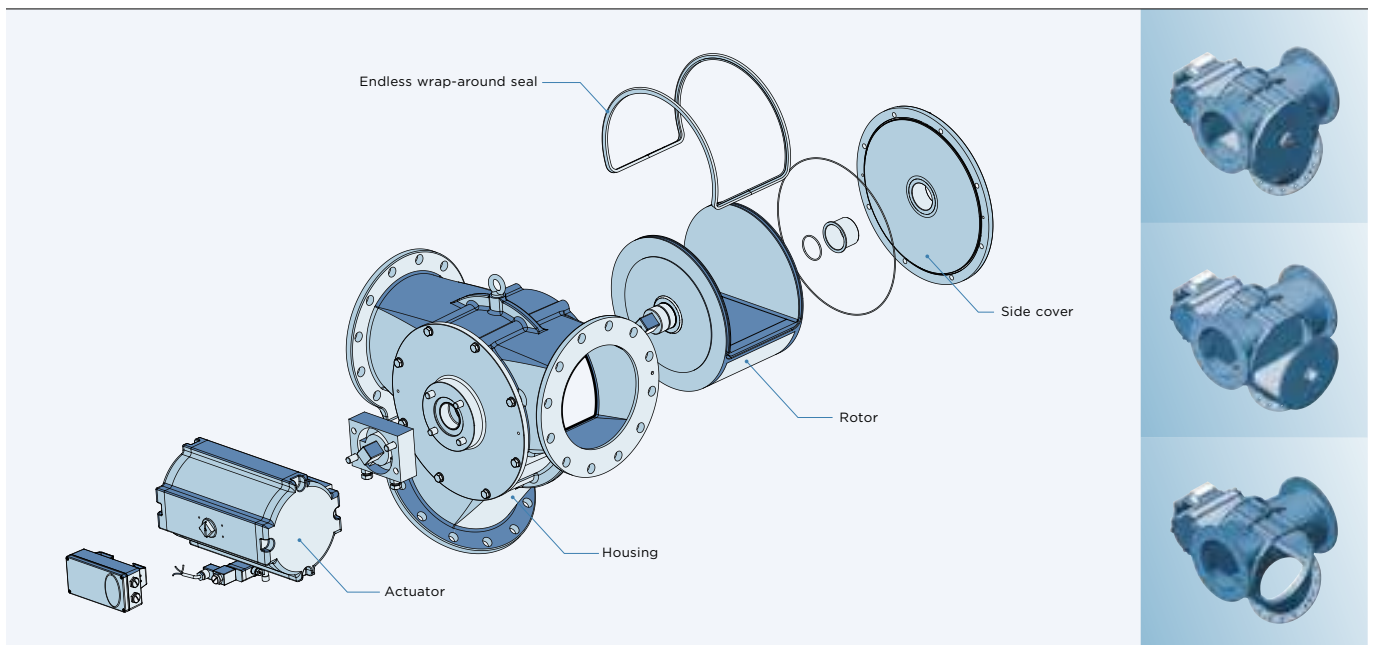

Straight through




Diverted



DIVERTER VALVE FOR POWDERS AND GRANULAR PRODUCTS | WHK

**PRESSURE RANGE** 3 barg (43 psi) system and differential pressure  
**OPERATION TEMPERATURE** -20°C up to 100°C  
**APPLICATION** Suitable for fluid group 2 according PED  
 (fluid group 1 on demand)  
**SEAL CONFIGURATION** Endless wrap-around seal  
**MATERIAL OF CONSTRUCTION** Stainless steel

**OPTIONS AND ACCESSORIES**  
 \_ Applicable in Ex-Zones with additional accessories  
 \_ Actuator on the left-hand or right-hand side  
 \_ Quick cleaning design  
 \_ Special execution for PTA/CTA applications

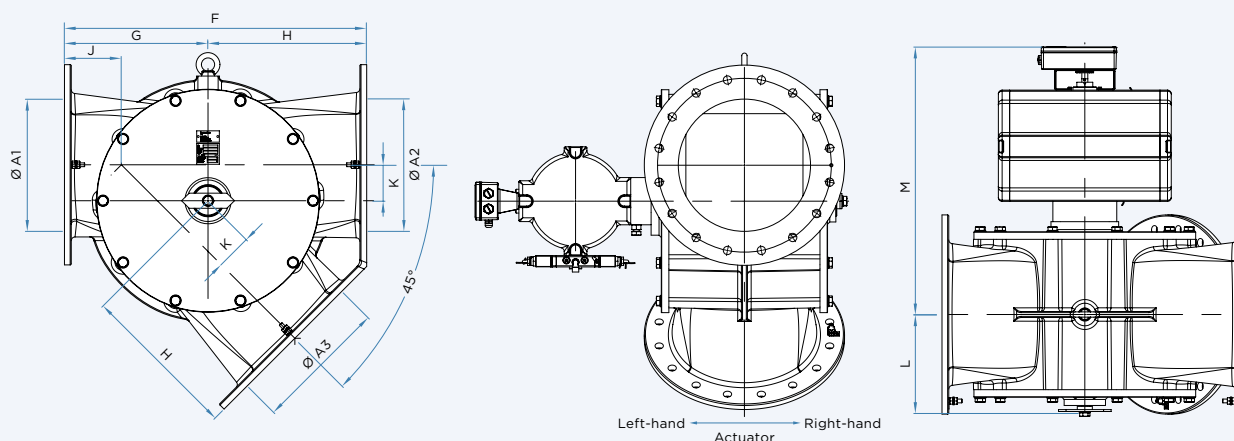

|         | Inlet*/Outlet* |                 |      |      |      | Other dimensions |     |     |     |     |     |     | Weight appr. kg |     |
|---------|----------------|-----------------|------|------|------|------------------|-----|-----|-----|-----|-----|-----|-----------------|-----|
|         | A1/A2/A3 (DIN) | A1/A2/A3 (ANSI) | Ø A1 | Ø A2 | Ø A3 | F                | G   | H   | J   | K   | L   | M   | AC              | SS  |
| WHK 150 | ND 150         | 6"              | 162  | 162  | 162  | 460              | 220 | 240 | 109 | 46  | 152 | 453 |                 | 100 |
| WHK 200 | ND 200         | 8"              | 212  | 212  | 212  | 530              | 250 | 280 | 112 | 57  | 180 | 529 |                 | 165 |
| WHK 250 | ND 250         | 10"             | 265  | 265  | 265  | 680              | 340 | 340 | 161 | 74  | 216 | 630 |                 | 220 |
| WHK 300 | ND 300         | 12"             | 316  | 316  | 316  | 750              | 355 | 395 | 150 | 85  | 250 | 657 | 195             | 348 |
| WHK 350 | ND 350         | 14"             | 350  | 355  | 355  | 800              | 380 | 420 | 151 | 95  | 271 | 713 |                 | 450 |
| WHK 400 | ND 400         | 16"             | 406  | 406  | 406  | 900              | 420 | 480 | 153 | 110 | 300 | 781 |                 | 700 |

Dimensions in mm

\* Drilled according to DIN PN 10 or ANSI 150 lbs